

**6E3109**

Roll No. \_\_\_\_\_

Total No of Pages: **4****6E3109****B.Tech. VI Sem. (Main & Back) Exam. May/June 2013****Electrical Engg.****6EE 1 Modern Control Theory****Time: 3 Hours****Maximum Marks: 80****Min. Passing Marks: 24***Instructions to Candidates:*

*Attempt any **five questions**, selecting **one question** from **each unit**. All questions carry **equal marks**. Schematic diagrams must be shown wherever necessary. Any data you feel missing suitably be assumed and stated clearly.*

*Units of quantities used/calculated must be stated clearly.*

*Use of following supporting material is permitted during examination.*

1. \_\_\_\_\_

2. \_\_\_\_\_

**UNIT – I**

Q.1. Define the following.

- |   |     |
|---|-----|
| (i) Linearity                               | [3] |
| (ii) Relaxedness                            | [3] |
| (iii) Time Invariance                       | [3] |
| (iv) Causality                              | [3] |
| (v) Linear vector space linear Independence | [4] |

**OR**

Q.1. (a) Derive the solution of homogeneous state equation. [8]

[6E3109]

Page 1 of 4

[9920]

- (b) Consider the homogeneous equation.

$$AX = 0$$

Where  $A = \begin{pmatrix} 0 & 1 & 1 & 2 & -1 \\ 1 & 2 & 3 & 4 & -1 \\ 2 & 0 & 2 & 0 & 2 \end{pmatrix}$

Find the linearly independent solution of this equation.

[8]

## UNIT – II

- Q.2. (a) What are the advantages and disadvantages of state space analysis.

[8]

- (b) Draw the free body diagram and write the differential equation of the mechanical system shown in figure 1

[8]

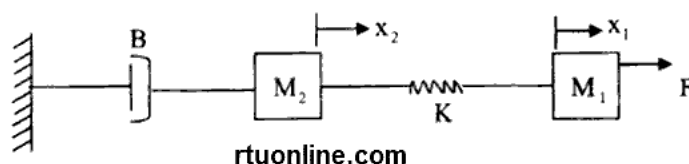


Figure 1

OR

- Q.2. (a) What are state variables? Give the advantages of modern control theory over conventional control theory.

[8]

- (b) For the system shown in figure 2, choose the state variable as  $v_1(t)$  and  $v_2(t)$  and write down the state equation.

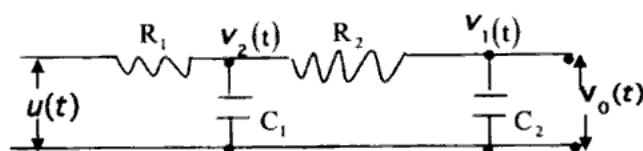


Figure 2

[8]

### UNIT – III

- Q.3. (a) Explain the procedure to convert a given state model into signal flow graph. [8]  
 (b) Obtain the transfer function if state model is given by.

$$\begin{bmatrix} \dot{x}_1 \\ \dot{x}_2 \end{bmatrix} = \begin{bmatrix} 0 & 1 \\ -2 & -3 \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \end{bmatrix} + \begin{bmatrix} 0 \\ 1 \end{bmatrix} u$$

$$Y = \begin{bmatrix} 1 & 0 \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \end{bmatrix} \quad [8]$$

### OR

- Q.3. (a) Explain cascade and parallel decomposition in brief. [6]  
 (b) Construct the state model in Jordan's canonical form for a system whose transfer is given by

$$\frac{Y(s)}{x(s)} = \frac{10}{(s+1)^2(s+2)} \quad [10]$$

### UNIT – IV

- Q.4. (a) Define diagonalization ? Explain its importance in modern control theory. [8]  
 (b) Define the following:  
 (i) Eigen values      (ii) Eigen vectors  
 (ii) State of a system      (iv) State transition matrix [8]

**OR**

Q.4. (a) State the duality between controllability and Observability. [8]

(b) Consider the state equation.

$$\begin{bmatrix} \dot{x}_1(t) \\ \dot{x}_2(t) \end{bmatrix} = \begin{bmatrix} 0 & 1 \\ -2 & -3 \end{bmatrix} \begin{bmatrix} x_1(t) \\ x_2(t) \end{bmatrix} + \begin{bmatrix} 0 \\ 1 \end{bmatrix} u(t)$$

Obtain the state transition matrix. [8]

**UNIT – V**

Q.5. (a) What are the properties of z- transform? Find the relationship between z and s domain. [8]

(b) Find the z- transform of  $\{u_n\}$  where

$$\{u_n\} = \begin{cases} 4^n & \text{if } n < 0 \\ 3^n & \text{if } n \geq 0 \end{cases} \quad [8]$$

**OR**

Q.5. (a) What is sampling process? Write short note on digital PID controller. [8]

(b) Find the z- transform of the following. [8]

(i)  $\frac{a}{(s+a)^2}$                       (ii)  $e^{-at} \sin \omega t$

By using the property of z- transform.