

6E3109

Roll No. _____

[Total No. of Pages : **4**]**6E3109****B.Tech. VIth Semester (Main/Back) Examination, June - 2010****Electrical Engineering****6 EE1 Modern Control Theory (Common for EE & EX)****Time : 3 Hours****Maximum Marks : 80****Min. Passing Marks : 24****Instructions to Candidates:**

*Attempt overall **Five questions** selecting **one question** from each unit. All questions carry **equal marks**. (Schematic diagrams must be shown wherever necessary. Any data you feel missing may suitably be assumed and stated clearly. Units of quantities used/calculated must be stated clearly.)*

Use of following supporting material is permitted during examination. (Mentioned in form No. 205)

1. Calculator.

Unit-I


1. a) Define linear, independence of vectors. What information do they give about the controllability of the system. Define
 - i) Bases
 - ii) Domain
 - iii) Range of a vector space. **(8)**
- b) How is Linearity defined in reference of a control system. Can a nonlinear system be linearised? Which techniques do you know? **(8)**

OR


- a) Differentiate between Modern and conventional control system. **(8)**
- b)
 - i) What is meant by causal and non-causal systems.
 - ii) Define state, state space and state space equations. **(8)**

Unit-II

2. a) Obtain the state space representation for the following mechanical system.(8)

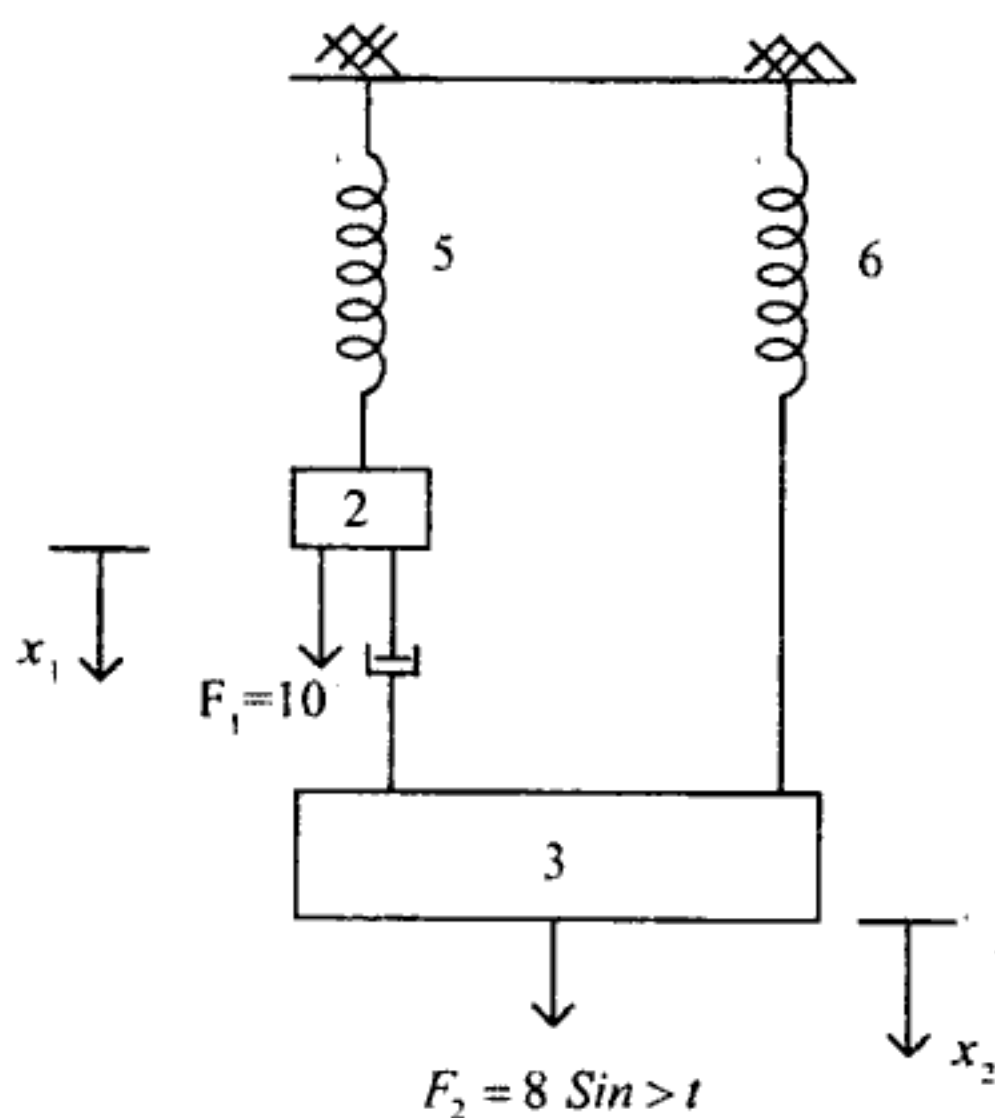

- b) Write differential equations governing the following electrical circuit and hence develop transfer function for it. (8)


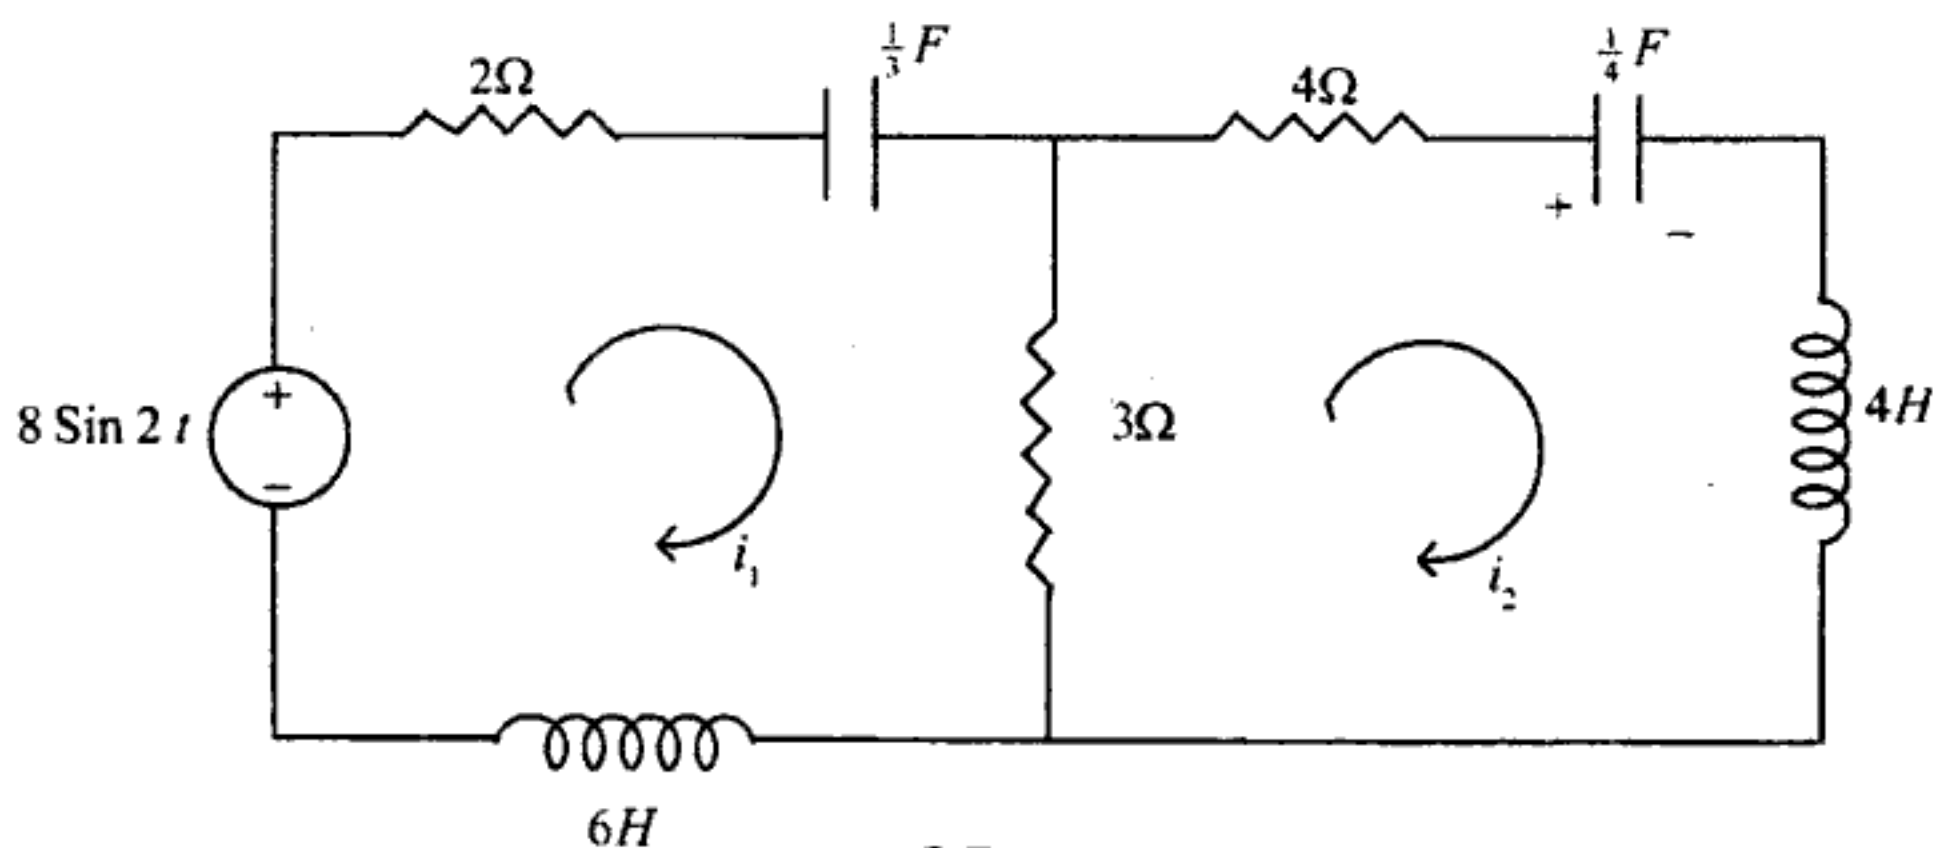


OR

- a) A system is described by following differential equation. Derive the state model for it.

$$\frac{d^3 y}{dt^3} + 6 \frac{d^2 y}{dt^2} + 2 \frac{dy}{dt} + 4y = -5 \frac{d^2 u}{dt^2} + 8 \frac{du}{dt} \quad (6)$$

- b) Show that systems shown in figures below are analogous systems. Find the transfer functions of both.

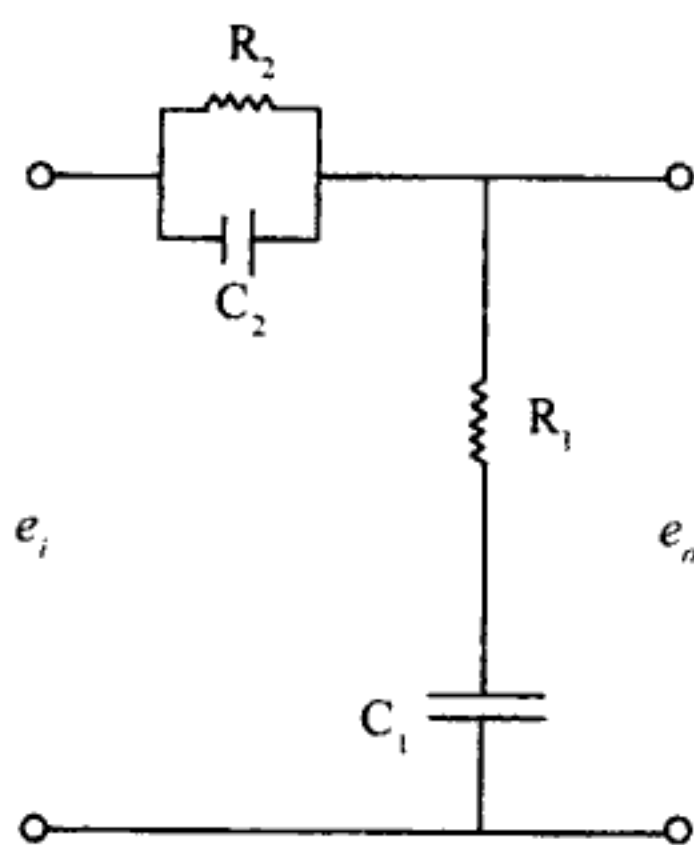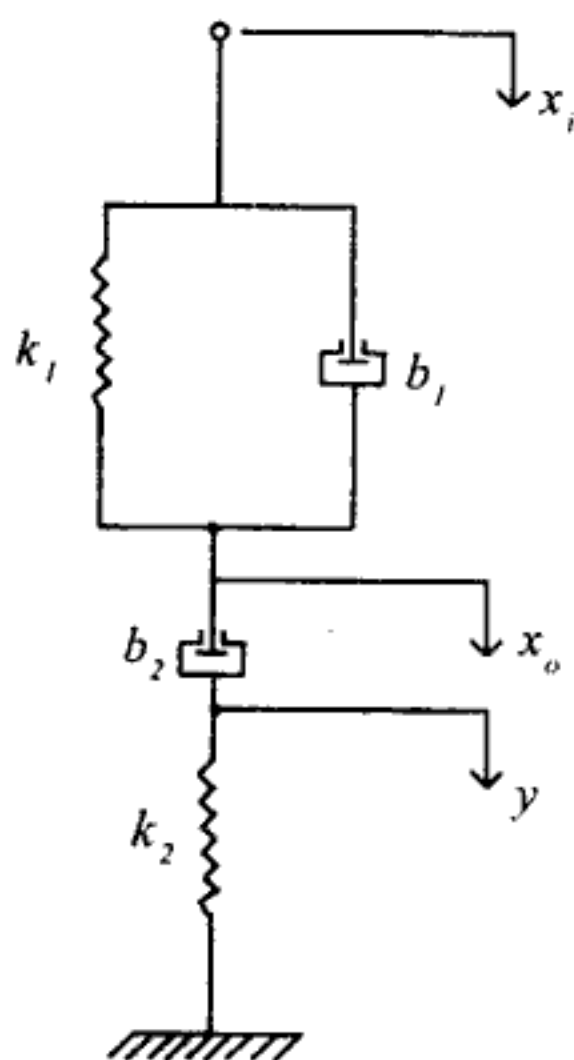

(10)

Unit-III

3. a) A control system is described by following transfer function.

$$\frac{Y(s)}{U(s)} = \frac{s+12}{s^2+7s+12} \text{ obtain the state space representation of this system in}$$

i) Controllable phase variable form.

ii) Observable phase variable form.

(8)

- b) Consider the system

$$\dot{x} = \begin{bmatrix} 0 & 1 \\ -2 & -3 \end{bmatrix} x, \quad x(0) = \begin{bmatrix} 0 \\ 1 \end{bmatrix} \text{ Find the free response of the system.} \quad (8)$$

OR

- a) Consider the system

$$\dot{X} = \begin{bmatrix} -3 & 1 \\ -2 & 0 \end{bmatrix} X + \begin{bmatrix} 0 \\ 1 \end{bmatrix} Y$$

$$Y = [1 \ 0] X.$$

Find the transfer function $\frac{C(s)}{R(s)}$ of the above system. (8)

- b) Consider the same system given in the above equation. Transform the

system by similarity transformation defined by $X = P \bar{X} = \begin{bmatrix} 2 & -1 \\ -1 & 1 \end{bmatrix} \bar{X}$. (8)

Unit-IV

4. a) For the system matrix

$$A = \begin{bmatrix} -4 & 1 & 0 \\ 0 & -3 & 1 \\ 0 & 0 & -2 \end{bmatrix} \text{ Find the eigenvalues and eigenvectors.} \quad (8)$$

- b) Write short notes on : **(any two)**

- i) State transition matrix
- ii) Caley - Hamilton Theorem
- iii) Kalman's method of controllability and observability. **(4 each)**

OR

- a) The transfer function $G(s)$ of a system is given by $G(s) = \frac{s+3}{(s+2)^2(s+5)}$.

Transform the system in Jordan canonical form. **(8)**

- b) Write short notes on : **(any two)**

- i) Pole - placement Design
- ii) Eigenvalues & Eigenvectors
- iii) Solution of state equation. **(4each)**

Unit-V

5. a) Consider the system $\dot{X} = AX + BY$ and $Y = CX$ with

$$A = \begin{bmatrix} 0 & 1 \\ 0 & 0 \end{bmatrix} \quad b = \begin{bmatrix} 0 \\ 1 \end{bmatrix} \quad \text{and} \quad c = [1 \quad 0]$$

Design a feedback control law to place the closed loop poles at $s = -4 \pm j4$. **(8)**

- b) How are digital control systems different from continuous time control systems. How are they analysed and what stability tests are available to check their stability. **(8)**

OR

Write short notes on : **(any two)**

- i) Ackerman's Formula.
- ii) Sampled data control systems.
- iii) Digital PID controller. **(8each)**